

DELIVERED FOR THE BEST

CATAMOUNT

C O A T I N G S

EST. 2017



ALL PRODUCTS ARE PROUDLY MANUFACTURED IN THE USA PREMIUM

R

degree°

CATAQUICK

LOW VOC



P R E M I U M U R E T H A N E CLEARCOATS



AVAILABLE IN: - CC-221 (5 LITER) - CC-22 S/M/F (2.5 LITER)





AVAILABLE IN: - CC-421 (GALLON) - CC-42 S/M/F (QUART)

MIX RATIO 2:1 Ratio

2 Parts Clearcoat **1** Part Activator CC-22F; CC-22M; CC-22S



SOLID CONTENT (WITHOUT REDUCER)



DRY TIME @ 77°F (TO TOUCH / TO POLISH) 30 mins / 6 hrs



AVAILABLE IN: - CC-271 (5L) - CC-47 S/M/F (2.5L)

CC - 4714:1 RATIO



- CC-471 (GALLON) - CC-47 S/M/F (QUART) MIX RATIO 2:1 Ratio

2 Parts Clearcoat (CC-27 **1** Part Activator CC-47F; CC-47M; CC-47S

SOLID CONTENT (WITHOUT REDUCER) 54%



FLASH TIME (BETWEEN COATS) 10-15 mins



DRY TIME @ 77°F (TO TOUCH / TO POLISH) 1 hr / 8 hrs



MIX RATIO 4:1 Ratio 4 Parts Clearcoat (CC-471) **1 Part Activator** CC-47F; CC-47M; CC-47S



(WITHOUT REDUCER) 43%

FLASH TIME (BETWEEN COATS) 10-15 mins




DRY TIME @ 77°F (TO TOUCH / TO POLISH) 30 mins / 6 hrs



4:1 Ratio **4 Parts Clearcoat 1 Part Activator** CC-42F; CC-42M; CC-42S

SOLID CONTENT (WITHOUT REDUCER) 40%


FLASH TIME 5-10 mins



(BETWEEN COATS)

DRY TIME @ 77°F (TO TOUCH / TO POLISH)



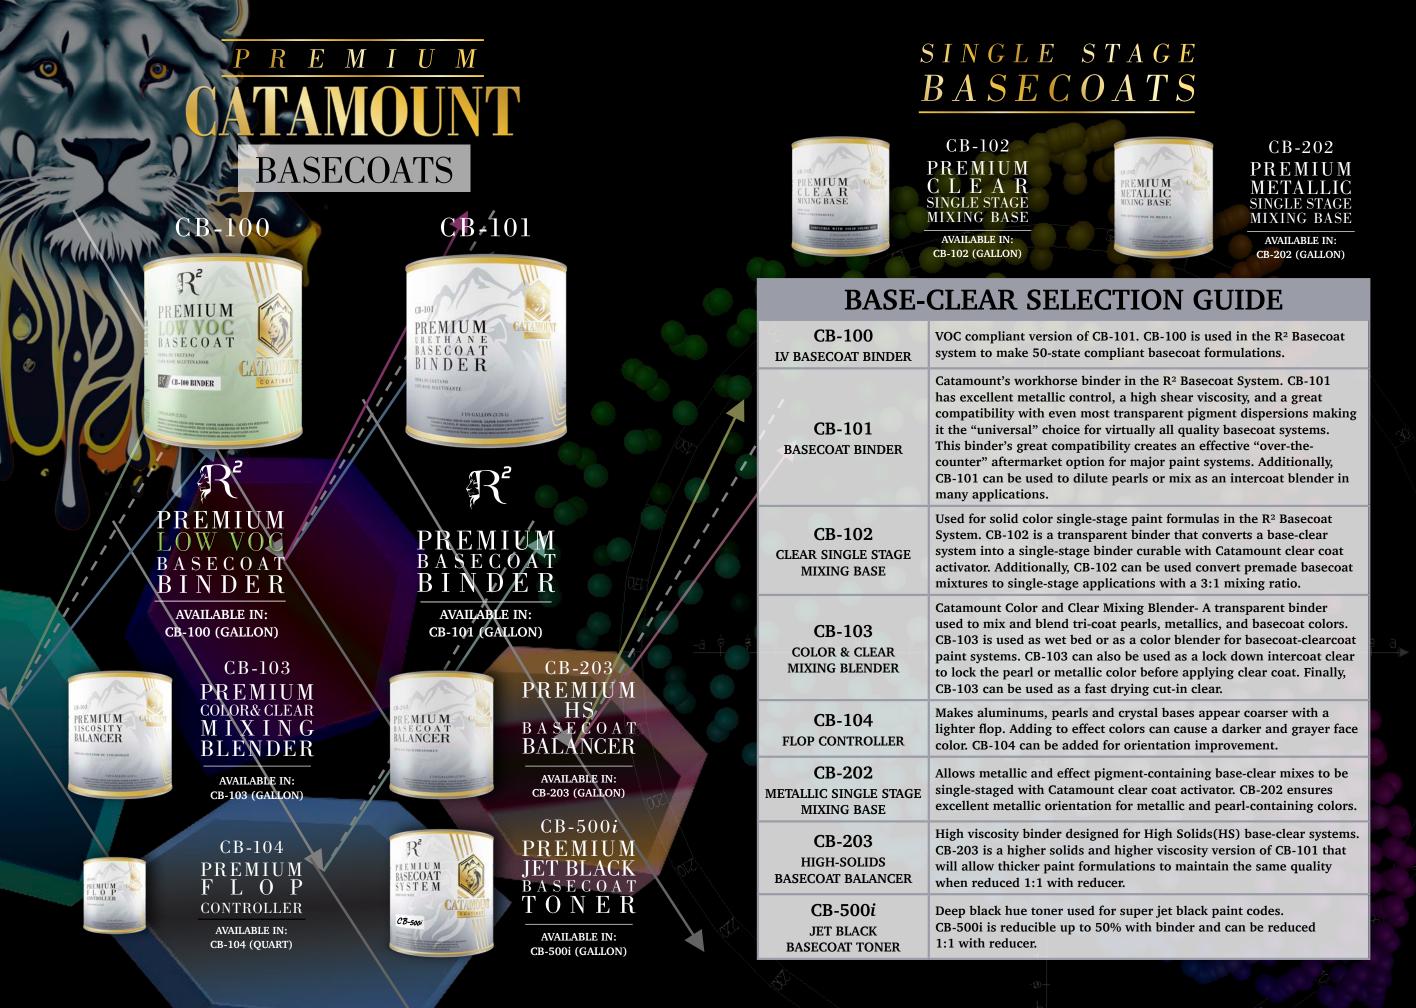

CONVERT ANY BASECOAT COLOR TO SINGLE-STAGE







PREMIUM METALLIC SINGLE STAGE MIXING BASE AVAILABLE IN:

SINGLE-STAGE SELECTION GUIDE

CB-102 PREMIUM CLEAR SINGLE STAGE **MIXING BASE**

CB-102 converts solid color formulations to single-stage while maintaining original color integrity. Activate your single-stage mixture with Catamount Premium Activator. Catamount Mixing Base solutions can be adjusted to control the viscosity of the application with reducer or balancer. Note: CB-102 should not be used with metallic or mica-containing toners.

CB-202 PREMIUM METALLIC **MIXING BASE**

Color formulations containing metallic flakes or pearl-effect pigments can be converted to single-stage without any sacrifice to gloss or orientation.

SINGLE-STAGE MIX RATIO GUIDE





EXPAND YOUR

R E M I U M CATAMOUNT REDUCERS



CR-007

R E M I U M

MEDIUM

REDUCEF

CR-010 EMIUMETHAN

LOW

DUCE

CR-004

PREMI URETHA

REDU

R E M I U M

CATAMOUNT

ADDITIVES

AVAILABLE IN: CB-004 FAST (QUART / 2.5L) CB-007 MEDIUM (QUART / 2.5L) **CB-010 SLOW (OUART / 2.5L)**

CB-013 HIGH-TEMP URETHANE REDUCER AVAILABLE IN: CB-008 (QUART)

Î

CB-013

HIGH-TEMP REDUCER



THANKS FOR LETTING US BE PART OF YOUR AMAZING WORK


CATAMOUNT CONCOCCO CONCCC

CUSTOMIZE THE GLOSS

CUSTOMIZE THE SHEEN OF YOUR CLEARCOAT WITH CATAMOUNT DEGREE.

CC-60 Catamount Degree Matte Clearcoat can be mixed 4:1 for a complete "matte" look or mixed in a ratio with CC-421 to achieve satin and semi-gloss finishes.

MIX CC-60 WITH CLEARCOAT FOR BASE-CLEAR FINISHES

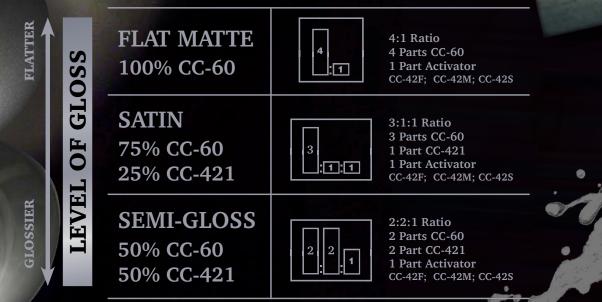

* For best results, spray a test panel to ensure that you have matched your desired gloss

REPLACE CB-102 OR CB-202 WITH CC-60 TO FLATTEN SINGLE-STAGE FINISHES AVAILABLE IN: - CC-60 (QUART)

MATCH ANY GLOSS FROM SINGLE-STAGE TO THREE-COAT WITH

ATIO.

C - 60

4.2 VOC

100100°

MATTE FINISH

LEARCOAT

LUS QUART (0.95 L)

APA TRANSPARENTE MATH

CATAMOUNT CONCO GLOSS MATCHING SYSTEM

TE FINIS

MIUM E A R NG BASE

EMIUM

ING BASE

CATA UICK

A-24

AVAILABLE IN:

- A-24 (PINT)

CATAQUICK ULTRA HIGH SOLIDS P E E**ČLEARCOAT** MIX RATIO П:п

CQ-24

2:1 RATIO

CATAQUICK

SPEED

CLEARCOAT

AVAILABLE IN:

- CQ-24 (QUART)



SOLID CONTENT (WITHOUT REDUCER) 60%

DRY TIME @ 77°F (TO TOUCH / TO POLISH) 10 mins / 1 hr

EASY TO USE

Cataquick products provide an excellent layout, a smooth flow, and easy sanding characteristics. These finishing qualities create an enjoyable experience for the painter.

Cataquick's high solids/low

viscosity formulation allows painters to complete jobs using no more than two coats to achieve phenomenal coverage with easy application.

FEWER COATS

LESS TIME

With faster dry and flash times, painters spend less time waiting for paint to dry and more time to move on to the next project.



LESS INVENTORY

Only one activator (A-24) is needed for both Cataquick primer and clear coat.

VOC COMPLIANT

All Cataquick's products are 2.1 VOC, meaning that you can use our eco-friendly, money-saving solution anywhere.

CATAQUICK ULTRA HIGH SOLIDS ACTIVATOR CQ-44 CATAQUICK ULTRA HIGH BUILD 2K SPEED P R I M E R

> CQ-44 **CATAO**UICK UETRA HIGH SOLIDS DIRECT TO METAL SPEED 2K PRIMER

AVAILABLE IN:

- CQ-44 (QUART)



2 Parts Primer (CQ-44) 1 Part Activator (A-24)

FLASH TIME (BETWEEN COATS) 60 - 90 Seconds







DRY TIME @ 77°F (TO SAND) 25 mins

PREMIUM meets COMPLIANCE CATAMOUNT





43%

DRY TIME @ 77°F GALLON (TO TOUCH / TO POLISH)

CC-42LVM **QUART**

AVAILABLE IN: - CC-421LV (GALLON) - CC-42LV S/M/F (QUART)

• 2.1 VOC • 50 STATE COMPLIANT •

30 mins / 6 hrs

CP-401LV PRIMER

CP-401LVLG (LIGHT GRAY) AVAILABLE IN: - CP-401LVLG (GALLON / QUART)

> CP-401LVK (BLACK) AVAILABLE IN: - CP-401LVK (GALLON / QUART)

CP-401LVW (WHITE) AVAILABLE IN: - CP-401LVW (GALLON / QUART)

CP-401LVR (RED) AVAILABLE IN: - CP-401LVR (QUART)

CP-401LVB (BLUE) AVAILABLE IN:

- CP-401LVB (QUART)

CP-401LVY (YELLOW) AVAILABLE IN: - CP-401LVY (QUART)

CP-401 PREMIUM COMPATIBLE

OUR CP-401 PRIMER SYSTEM MADE IN 2.1 VOC

• OUTSTANDING PERFORMANCE •

CP-401LV

4:1 RATIO

ATAMOUNT

CP-401LV

2K PREMIUM

PRIMER SYSTEM

ER PRIMER SURFACER U

LOW VOC

1 US GALLON (3.781)

1111


CP-41LV

2K PREMIUM PRIMER SYSTEM

LOW VOC

MEDIUM ACTIVATOR

VOC R SOSTATE

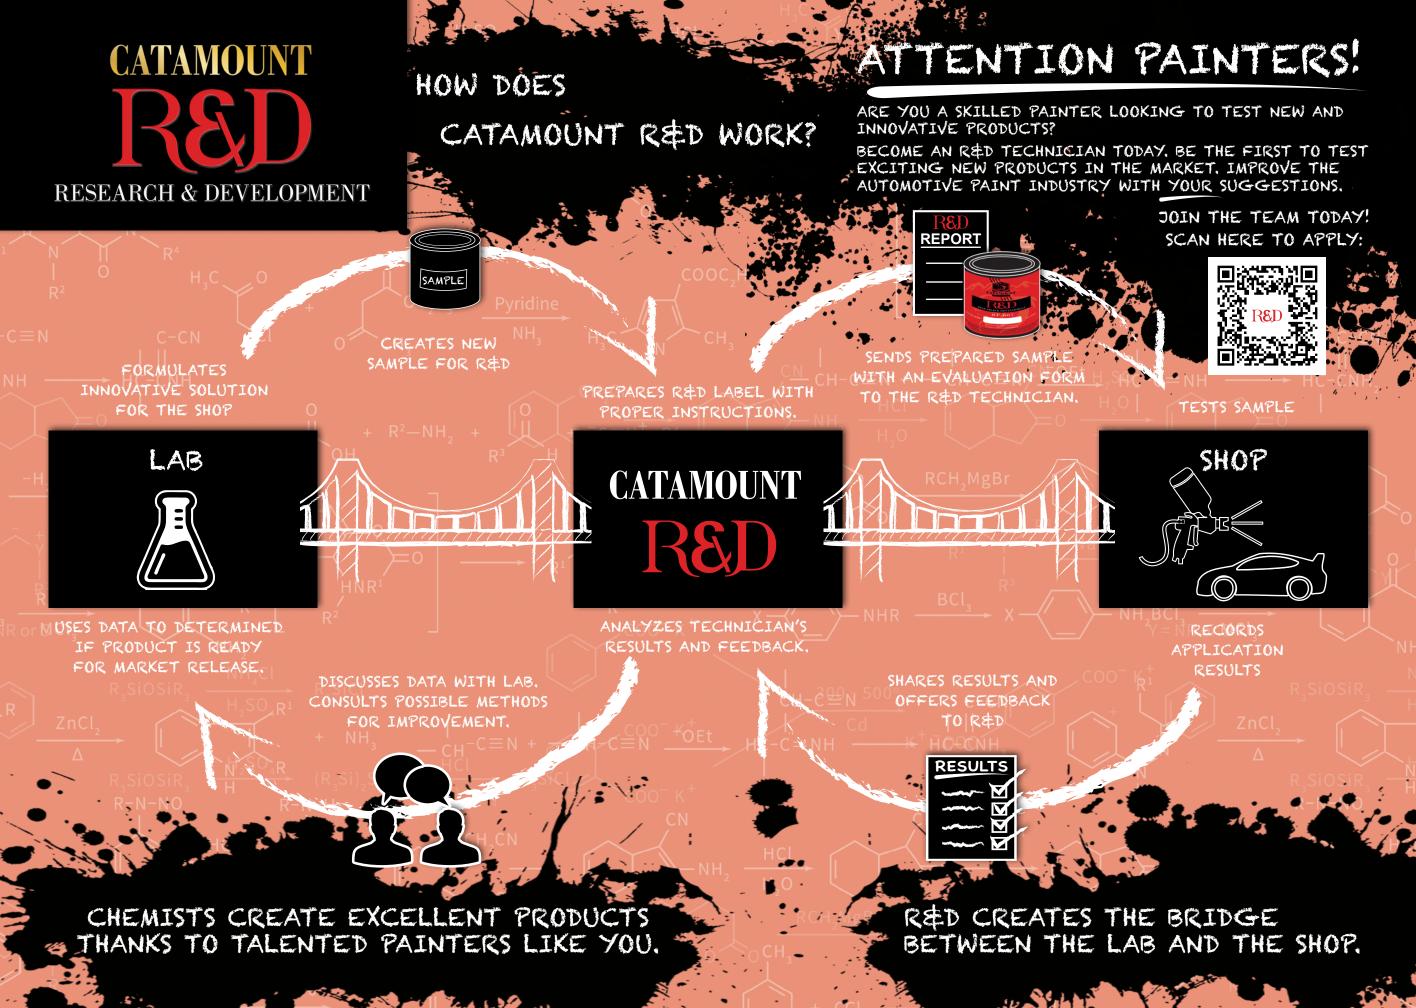

Thanks for choosing Catamount Coatings!

We're grateful for your appreciation of quality and innovative solutions.

PB 122





WWW.CATAMOUNTCOATINGS.COM 980-376-2325 MANUFACTURED BY: CCG PRODUCTS, INC. LILLINGTON, NC